



Digta 405

A high-capacity dictation machine for beginners


Digta 405

A powerful start into the world of digital dictation


The professional qualities of the Digta 405 help make digital dictation easy: Recording and play-back operation with easy to use push buttons. The 32 MB internal memory allows up to 5 hours of voice recordings – in the DSS standard of course. The integrated USB interface is the ideal feature, perfect for things like desktop dictation onto the PC.

Extremely comfortable for dictating on the move:
Beautifully engineered with sleek styling:

- High quality mobile digital dictation machine with highly ergonomic design
- 32 MB of internal memory for almost 5 hours of recording time
- Directory-based storage, with up to six folders available for filing dictations
- Clock function for creating time stamps in dictations
- Software DigtaSoft included
- USB interface for: Transferring dictations to PC, USB power supply and use as desktop PC microphone



Including DigtaSoft software and ...



... audio USB to dictate onto the PC



Digta 405


Operating Controls



Functions/Equipment

Storage medium/folder	32 MB of internal memory, a DSS folder, 5 subfolders A-E
Display	Yellow illuminated full-graphic display, all functions shown as symbols, menu with English texts, recording LED
File name	4 characters for author name + 4-digit serial number
Record/playback, operation, fast forward, rewind	Push buttons (start, stop, rewind, fast forward and recording button)
Variable play backspeed	Can be switched to approx. 1.5x
Key lock	On/Off switch with keylock function
Function buttons	New button (new dictation), 2 selection buttons, 2 navigation buttons, label in bottom display line
Edit functions	New dictation, insert dictation, delete all folders, delete one folder, delete dictation, delete part of a dictation
Clock	Time stamps in dictations for "Created" and "Dictated"
Menu functions	Folder selection, delete, microphone sensitivity for loud dictation/normal dictation/conference, voice activation, display illumination, set time/date, reset dictation counter, show software version, format memory, restore default settings
Dictation accompanying information: author name, priority, transcriber, dictation type, group, number/ref.	Can be edited on PC, loaded to device and applied to all dictations
Audible signals	Readiness for operation after switching on, low battery, full memory
USB modes	USB removable storage medium for transferring dictations to and from PC, USB audio for direct dictation to PC, for example a voice recognition system, with effective start/stop button (mute), USB power supply to protect battery
DigtaSoft	PC software for the easy recording, transfer, processing and sending of dictations on DigtaSoft networks up to a maximum of 10 users. Configuration of dictation machine.

The Display

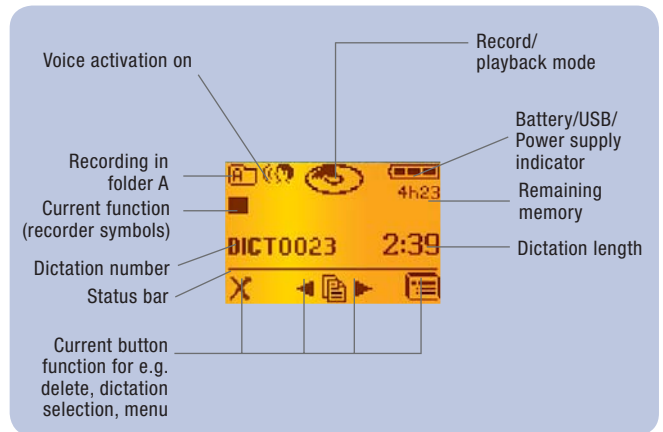

Technical data

Memory medium	32 MB of internal hard disk with up to 4 hours and 44 minutes recording time
File format	DSS, standard play
Memory requirements	For 10 min. speech approx. 1 MB
Data rate	Approx. 13,6 kbit/s
Frequency response	300–5500 Hz (voice recognition possible)
Max. power output	140 mW
Loudspeaker	28 mm diameter
Microphone socket	3.5 mm jack
Earphone socket	3.5 mm jack, impedance 32 Ohm, maximum output voltage $V_m = 80$ mV
PC interface	USB 1.1
Batteries	2 x 1,5 V, Typ Micro/AAA
Power socket	Mini-USB
Dimensions (without protruding controls)	Length approx. 127 mm, width approx. 54 mm Depth approx. 21 mm
Weight	Approx. 100 g, including batteries
Housing	Acrylic glass composite, blue freeze colour
System requirements for DigtaSoft	WIN 2000/XP/Vista, MAPI-compatible mail system, (e.g. Microsoft Outlook), USB 1.1/2.0

Accessories included

Digta 405, USB cable, batteries, CD with PC software, pouch

Optional Accessories

	USB RollUp 991, DigtaDirectMic 941, DigtaConfMic 945, DigtaEarphone 951, mains unit 475, DigtaCase 721, DigtaJacket 916, DigtaTravel Set
DigtaSoft Pro	PC software with additional features like extended memory and export functions, comfort settings for player, a reporting tool and others. Digta Soft Pro is also suitable for larger DigtaSoft networks with more than 10 users. An update from DigtaSoft is possible at any time.

Transcribe Thames Group
Franks Hall
Franks Lane
Horton Kirby
Kent
DA4 9JJ
Tel. 08701 622511
Fax. 01322 420408

www.ttg-uk.com salesteam@ttg-uk.com

GRUNDIG
Business Systems

Please make sure to choose only genuine accessories from Grundig. Product liability and warranty service are provided only in this case. The use of non-Grundig accessories or those which are not recommended and approved by Grundig automatically void any warranty claims towards Grundig. Grundig Business Systems GmbH, Emmericher Str. 17, D-90411 Nuremberg, E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com.

In the UK: Grundig Business Systems (UK) Ltd., Suite 5R14 (5th Floor Red Zone), Elstree Business Centre, Elstree Way, UK-Borehamwood WD6 1RX.
In the US: GBS North America, L.L.C., 225 W Washington, Suite 2200, Chicago, IL 60606, Tel.: +1 312 924-2878
Printed in Germany. We reserve the right to make technical changes and improvements. ORDER NUMBER: H. NE 6030 07/2007