



Digta 410

The dictation machine for all your needs



Digta 410

Dictation for professionals

The Digta 410 stands out through details that professionals will appreciate:

The 32 MB hard disk allows up to 5 hours of voice recording – in the .dss standard, of course.

The integrated USB interface provides the perfect range of functions, for example for stationary dictation on a PC. In short, this is an all-rounder for professional requirements.

Especially pleasant when dictating on the road:
The ergonomic design coupled with a flat housing.

- High-quality digital mobile dictation machine with highly ergonomic design
- 32 MB of internal memory for nearly 5 hours of recording time
- Organized storage for dictations, for example according to subject matter in up to six folders
- Clock function for creating time stamps in dictations
- Software DigtaSoft included
- USB interface for:
Transferring dictations to PC,
USB power supply and
use as stationary PC microphone



Includes DigtaSoft PC software and ...



... USB audio for Dictating on the PC

Digta 410

The Controls




Functions

Data carrier/folder	Internal memory 32 MB, 1 DSS folder, 5 subfolders A–E, optional DigtaCard
Display	Illuminated full-graphic display, all functions shown as symbols, menu with English texts, recording LED
File name	4 characters for author name + 3-digit serial number
Record/play, fast forward, rewind	4-function sliding switch and recording button
Variable playback speed	Can be switched to approx. 1.5x
Keylock	On/Off switch with keylock function
Function buttons	New button (new dictation), 2 selection buttons, 2 navigation buttons, label in bottom display line
Edit functions	New dictation, insert in dictation, delete all folders, delete one folder, delete dictation, delete part of dictation
Clock	Time stamps in dictations for "Created" and "Dictated" status
Menu functions	Folder selection, delete, microphone sensitivity for loud dictation/normal dictation/conference, voice activation, display illumination, set time/date, reset dictation counter, show software version, format memory, restore default settings
Additional dictation information: author name, priority, transcriber, dictation type, group, number/ref.	Can be edited on PC, loaded to device and applied to all dictations
Audible signals	Readiness for operation after switching on, low battery, full memory
USB modes	USB removable storage medium for transferring dictations to and from PC, USB audio for direct dictation to PC, for example a voice recognition system, mute, USB power supply to protect battery
DigtaSoft	PC software for the easy recording, transfer, processing and sending of dictations on DigtaSoft networks up to a maximum of 10 users. Configuration of dictation machine.

Transcribe Thames Group
 Franks Hall
 Franks Lane
 Horton Kirby
 Kent
 DA4 9JJ
 Tel. 08701 622511
 Fax. 01322 420408
 www.ttg-uk.com salesteam@ttg-uk.com

The Display

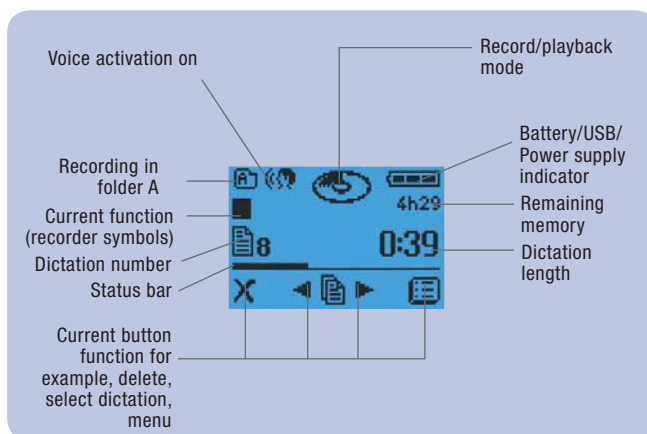

Technical data

Memory medium	Internal hard disk 32 MB with up to 4 hrs. and 44 minutes recording time
File format	DSS Standard Play
Memory requirement	For 10 min. speech approx. 1 MB
Data rate	Approx. 13.6 kbit/s
Transmission range	300–5500 Hz (voice recognition possible)
Max. output power	140 mW
Loudspeaker	28 mm diameter
Microphone socket	3.5 mm jack
Earphone socket	3.5 mm jack, mono (stereo headphones can be used) max. output limited to 90 mV, earphone impedance min. 32 Ohms
PC interface	USB 1.1
Batteries	2 x 1.5 V, Micro/AAA
Power socket	Mini USB
Dimensions (without protruding controls)	Length approx. 127 mm, width approx. 54 mm Depth approx. 21 mm
Weight	Approx. 100 g, including batteries
Housing	High-quality ABS plastic, Wallstreet silver
System requirements for DigtaSoft and DigtaSoft Pro	WIN 2000/XP/Vista, MAPI-compatible mail system, (e.g. Microsoft Outlook), USB 1.1/2.0

Accessories included

Digta 410, USB cable, batteries, CD with PC software, pouch

Optional accessories

DigtaSoft Pro	DigtaDirectMic 741, DigtaConfMic 945, DigtaEarphone 951, USB Mini Short Cable, USB RollUp 991, DigtaCase 721, DigtaJacket 916, DigtaTravel Set PC software with additional features like extended memory and export functions, comfort settings for player, a reporting tool and others. Digta Soft Pro is also suitable for larger DigtaSoft networks with more than 10 users. An update from DigtaSoft is possible at any time.
---------------	---

Please make sure to choose only genuine accessories from Grundig. Product liability and warranty service are provided only in this case. The use of non-Grundig accessories or those which are not recommended and approved by Grundig automatically void any warranty claims towards Grundig. Grundig Business Systems GmbH, Emmericher Str. 17, D-90411 Nuremberg, E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com.

In the UK: Grundig Business Systems (UK) Ltd., Suite 5R14 (5th Floor Red Zone), Elstree Business Centre, Elstree Way, UK-Borehamwood WD6 1RX. In the US: GBS North America, L.L.C., 225 W Washington, Suite 2200, Chicago, IL 60606, Tel.: +1 312 924-2878 Printed in Germany. We reserve the right to make technical changes and improvements. ORDER NUMBER: H. NE 5137 07/2007

GRUNDIG
 Business Systems